

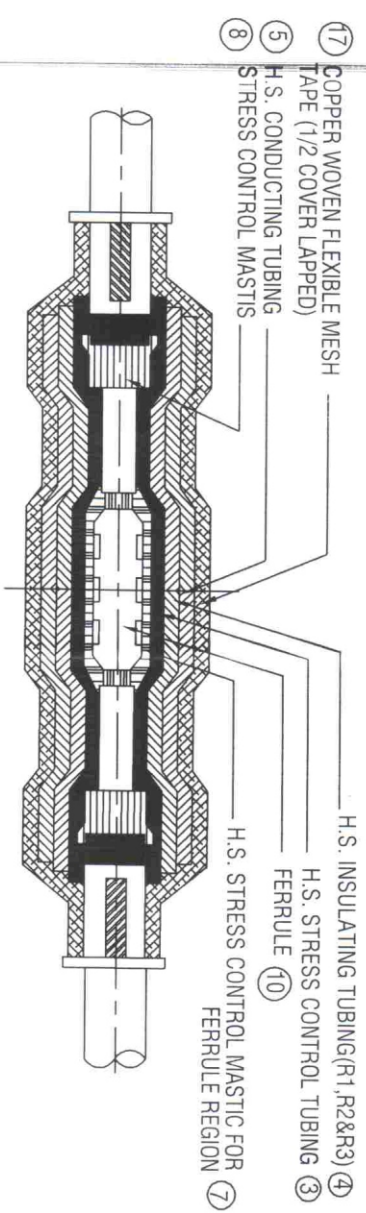


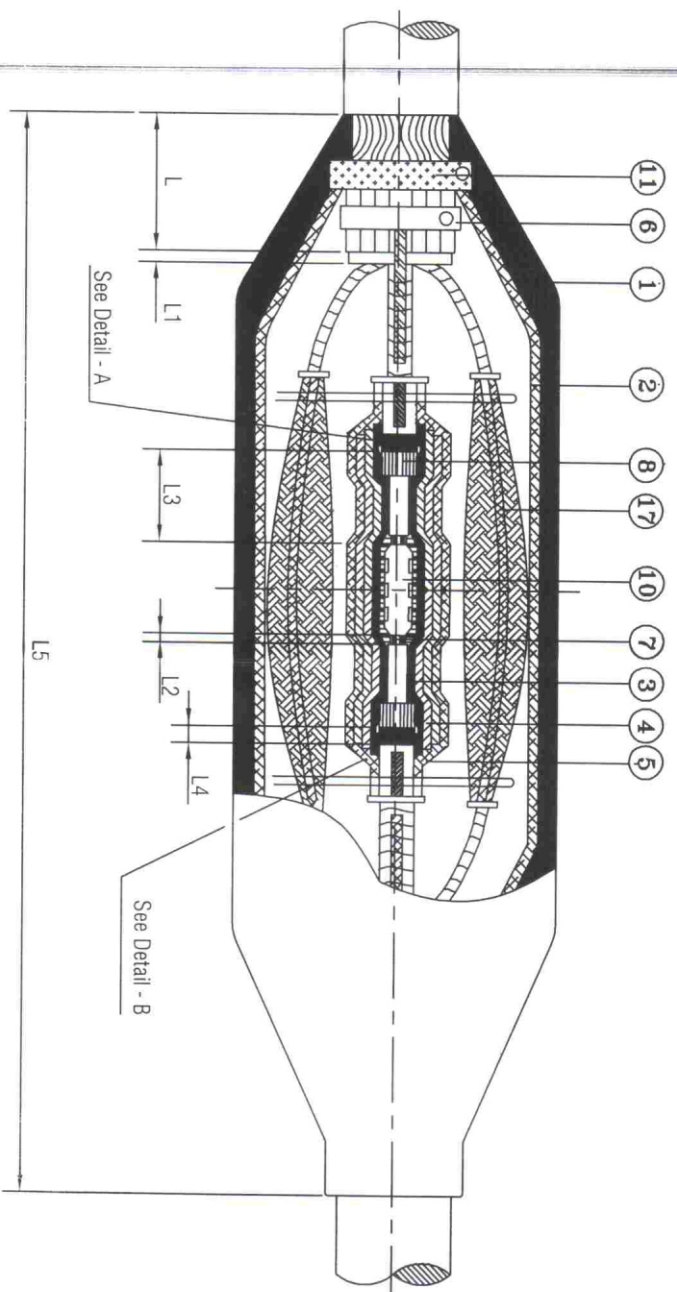

DETAIL - 'A'

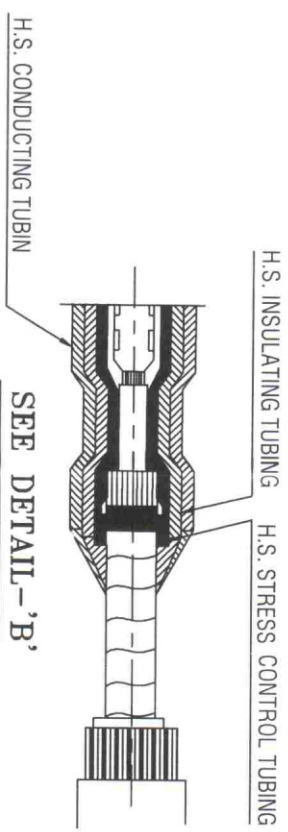

400-500	125	10	10	90	25	1445
240-300	115	10	10	90	25	1420
120-185	110	10	10	90	20	1360
70-95	100	10	10	90	20	1240
16-50	75	10	10	90	20	1220
Cable size sq. mm	L	L1	L2	L3	L4	L5

Cable Cutting Dimensions for 1 & 3 Core XLPE Cables

L4	LENGTH OF SEMI CONDUCTING SCREEN
L3	LENGTH OF XLPE INSULATION
L2	LENGTH OF BARE CONDUCTOR BETWEEN FERRULE AND XLPE INSULATION
L1	LENGTH OF LEAD SHEATH
L	LENGTH OF ARMOUR
LEGEND	

18	DETAILED INSTRUCTION MANUAL
17	METAL SCREEN CONTINUITY SYSTEM CONSISTING OF COPPER WOVEN FLEXIBLE MESH TAPE + SMALL TINNED COPPER BRAIDE SOLDER + FLUX
16	CLEANING TISSUES
15	MOPPING CLOTH
14	PVC ADHESIVE TAPE
13	ALOXITE EMERY TAPE
12	NYLONE STRING
11	MASTIC SEALING TAPES
10	INLINE CONNECTORS (FERRULE)
9	SILICON GREASE
8	STRESS CONTROL MASTIC
7	STRESS CONTROL MASTIC FOR FERRULE REGION
6	ARMOUR EARTHING MATERIAL (BACKUP RING -2 NOS. + TINNED COPPER BRAIDE + JUBILEE CLAMP -2 NOS.)
5	HEAT SHRINKABLE CONDUCTING TUBINGS
4	HEAT SHRINKABLE INSULATION TUBINGS (R1 & R2)
3	HEAT SHRINKABLE STRESS CONTROL TUBINGS
2	G. I. MESH TAPE
1	HEAT SHRINKABLE ADHESIVE LINE OUTER JACKETING SLEEVE
S.No.	DESCRIPTION OF KIT CONTENTS

A-1 ELECTRICALS

RAJKOT - 360001, Gujarat (India)

HEAT SHRINKABLE STRAIGHT THROUGH JOINT SUITABLE FOR 24 KV 3&1 CORE, XLPE CABLES

DRG.No. A-1/04/09

DRAWN	CHECKED	APPROVED	DIMENSION	SCALE
BY	BY	BY	MM	NTS

Dr. Pradyumn