## Double Compression Medium Duty Cable Glands

## For Armoured & Unarmoured Cables


## Technical Data:


Material : Brass Plating : Nickle Plated

Entry Threads : BSC Standard (Matric /NPT also available)

Sealing Rubber Ring : Natural

Application: Used in normal climatic condition for armoured & unarmoured cables.

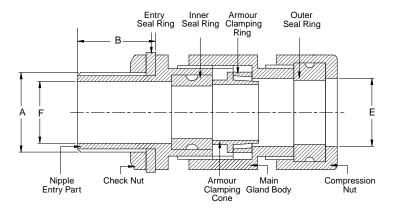



Suitable Cable Over all Dia		Size		ze	A Nipple Entry	B Length		C (A/F)		D (A/C)		E Dia.		F Dia.	
From	То		mm	inches	Inches	mm		mm		m	ım	Q	ð mm	Ø mm	
6.0	9.0		10	3/8"	5/8"	25.0		20.5	5	2	3.5		10.0	7.0	
6.0	12.0		12	1/2"	5/8"	25.0		23.0	)	2	6.0		13.5	11.0	
12.0	16.5		16	5/8"	3/4"	25.0		23.0	)	2	6.0		16.5	14.0	
16.5	18.5		19	3/4"	3/4"	25.0		25.5	5	2	9.5		19.0	14.0	
18.5	20.0		22	7/8"	3/4"	25.0		28.0	)	3	2.0		20.0	14.0	
20.0	23.0		25	1"	1"	25.0		31.5	5	3	6.0		23.5	19.0	
23.0	26.0		28	1 1/8"	1 1/8"	25.0		35.5	5	4	1.0		27.0	22.5	
26.0	30.0		32	1 1/4"	1 1/4"	25.0		41.0	)	4	7.0		32.0	25.5	
30.0	33.0		35	1 3/8"	1 1/2"	25.0		44.0	)	5	0.5		35.0	27.5	
33.0	37.0		38	1 1/2"	1 1/2"	25.0		46.0	)	5	3.0		38.0	31.0	
37.0	41.0		45	1 3/4"	2"	25.0		57.0	)	6	5.5		44.5	42.0	
41.0	46.0		50	2"	2"	25.0		61.0	)	7	0.5		51.0	42.0	
46.0	52.0		57	2 1/4"	2 1/4"	25.0		67.0	)	7	7.0		57.0	50.0	
52.0	54.0		63	2 1/2"	2 1/2"	25.0		79.0	)	9	1.0		63.0	54.5	
54.0	61.0		70	2 3/4"	2 3/4"	25.0		82.0	)	9	5.0		69.5	62.0	
61.0	72.0		75	3"	3"	25.0		90.0	)	10	5.0		75.0	65.0	
72.0	78.0		82	3 1/4"	3 1/4"	25.0		95.0	)	10	9.0		82.0	74.5	
78.0	84.0		88	3 1/2"	3 1/2"	25.0		106.0	)	12	3.0		88.0	78.0	
84.0	94.0		100	4"	4"	25.0		116.0	)	13	5.0		98.0	87.0	

Tolerance ± 1mm