

Industrial Brass Cable Gland Type : BW


For Armoured Cables

Suitable for dry indoor conditions. For single wire armoured, plastic or rubber sheath cables. Three part armour lock. Provides mechanical cable retention and electrical continuity via armour locking.

Tested as per IEC 62444:2010

TECHNICAL DATA

Type	: BW
Design Specification	: BS 6121:Part 1:2005, IEC 62444
Gland Material	: Brass
Armour Clamping	: Three Part Armour Lock
Cable Type	: Single Wire Armour (SWA)

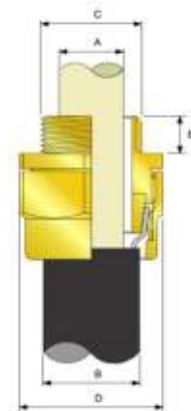

Part No.	Gland size	Entry thread (C)	Min. thread length (E)	Cable bedding dia. (A) max.	Overall cable dia. (B) max.	ARMOUR RANGE		Across corners (D) max	Pack qty
						MIN.	Max.		
ABW-16S	16S	M16	9	8	12	0.9	1.25	22	2
ABW-16	16	M16	9	8.6	13.5	0.9	1.25	22	2
ABW-B0S	20S	M20	9	12.3	17	0.9	1.25	24	2
ABW-20	20	M20	9.5	14.3	20	0.9	1.25	27	2
ABW-25S	25S	M25	9.5	19	23.25	1.25	1.6	34	2
ABW-25	25	M25	9.5	20.4	27	1.25	1.6	37	2
ABW-32	32	M32	9.5	26.5	33	1.6	2	45	2
ABW-40S	40S	M40	12.5	31	37.5	1.6	2	49	1
ABW-40	40	M40	12.5	33	41.5	1.6	2	54	1
ABW-50S	50S	M50	12.5	39.5	48	2	2.5	63.5	1
ABW-50	50	M50	12.5	44	54	2	2.5	68	1
ABW-63S	63S	M63	14	50.5	60.5	2.5	2.5	77	1
ABW-63	63	M63	14	56	65	2.5	2.5	84.5	1
ABW-75S	75S	M75	14	62.5	72	2.5	2.5	93	1
ABW-75	75	M75	14	67.5	78.5	2.5	2.5	99	1