

# Industrial Brass Cable Gland Type : CW


## For Armoured Cables

Suitable for indoor and outdoor conditions. For single wire armoured, plastic or rubber sheath cables. Terminates and secure cable armour and outer seal grips. Sheath of cable ensuring mechanical strength and earth continuity.

Tested as per IEC 62444:2010

### TECHNICAL DATA

Type	: CW
Design Specification	: BS 6121:Part 1:1989, EN 50262:1999, IEC:62444
Gland Material	: Brass
Armour Clamping	: Three Part Armour Lock
Seal Material	: Thermoplastic Elastomer
Seal Method	: Compression Sealing
Sealing Area	: Cable Outer Sheath
Cable Type	: Single Wire Armour (SWA)
Finish	: Natural Brass / Nickel Plated

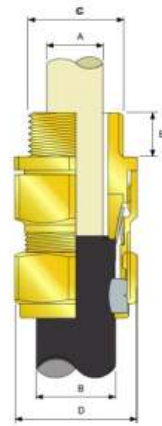

Part No.	Gland size	Entry thread (C)	Min. thread length (E)	Cable bedding dia. (A) max.	Overall cable dia. (B) max.	ARMOUR RANGE		Across corners (D) max	Pack qty
						min.	max.		
ACW16S	16S	10	8	11	0.15	0.35	23	2	
ACW16	16	M16	10	9	13	0.15	0.35	23	2
ACW20S	20S	M20	10	12.5	15	0.15	0.35	24	2
ACW20	20	M20	10	14.3	19	0.15	0.5	29	2
ACW25S	25S	M25	10	18.4	23.6	0.15	0.5	34	2
ACW25	25	M25	10	20.7	27	0.15	0.5	38	2
ACW32	32	M32	10	27	32.5	0.15	0.55	46	2
ACW40S	40S	M40	10	31.7	37	0.2	0.6	50	1
ACW40	40	M40	10	33.25	39	0.2	0.6	54	1
ACW50S	50S	M50	14.5	39.8	46	0.5	0.8	62.7	1
ACW50	50	M50	14.5	44	50	0.5	0.8	69.5	1
ACW63S	63S	M63	14.5	50.5	59	0.5	0.8	78	1
ACW63	63	M63	14.5	56	62	0.5	0.8	85	1
ACW75S	75S	M75	15	62.7	71	0.5	1	95	1
ACW75	75	M75	15	67.9	77.5	0.5	1	103	1